


SLD-1190-90-YY-1

Fiber Coupled Superluminescence Diode (SLD)

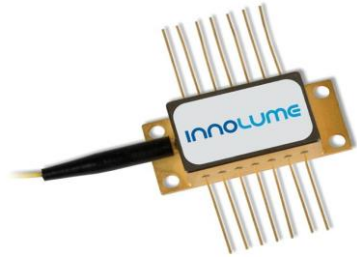

Features:

- Broadband ASE spectra (1140-1250nm)
- Low ripples
- Strong linear polarization
- Individual burn-in and thermal cycling screening
- RoHS compliance

Applications:

- Fiber sensors, instrumentation, spectroscopy

SPECIFICATIONS


Test conditions: CW operation, chip temperature 25°C, the case is mounted on room temperature heatsink

Parameters	Symb.	Min.	Typ.	Max.	Unit
Operating output power	P _{out}	0.5	1.0		mW
Mean wavelength	λ_m	1180	1190	1200	nm
Bandwidth @ -3dB	$\Delta\lambda$	75	90		nm
Spectrum dip amplitude			5	10	dB
Ground state maximum position	λ_g	1215	1225	1235	nm
Excited state maximum position	λ_e	1150	1160	1170	nm
ASE spectrum ripples*			0.02	0.1	dB
Polarization Extinction Ratio	PER	15	20		dB
Operating current	I _{op}		300	400	mA
Forward voltage	V _f		1.4	1.6	V
Rise time	T _{rise}		0.5		ns
Fall time	T _{fall}		0.5		ns




* RMS in 1nm range at ASE maximum, 10pm resolution

TYPICAL PERFORMANCE for reference only

Test conditions: CW operation, chip temperature 25°C, the case is mounted on room temperature heatsink

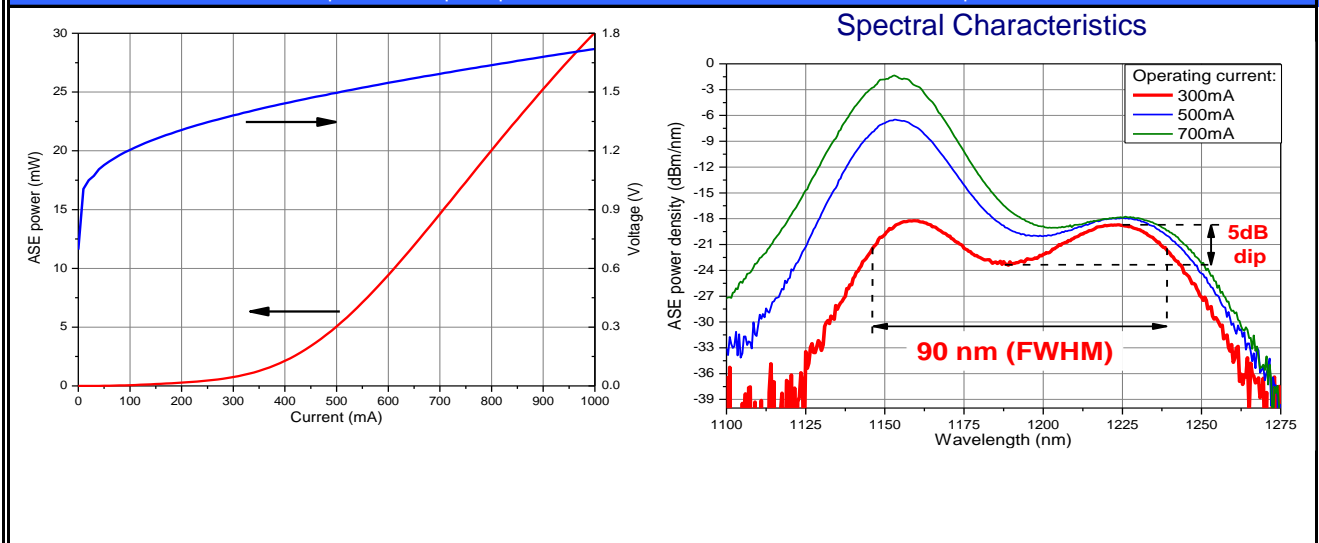

ABSOLUTE MAXIMUM RATINGS			
Parameters	Min.	Max.	Unit
SLD reverse voltage	-	2	V
SLD CW forward current	-	lop+300	mA
Thermo Electric Cooler current	-	3	A
Thermo Electric Cooler voltage	-	4	V
Fiber bend radius	3	-	cm
Chip operating temperature range	5	40	°C
Case operating temperature range	0	70	°C
Storage temperature range	-40	85	°C

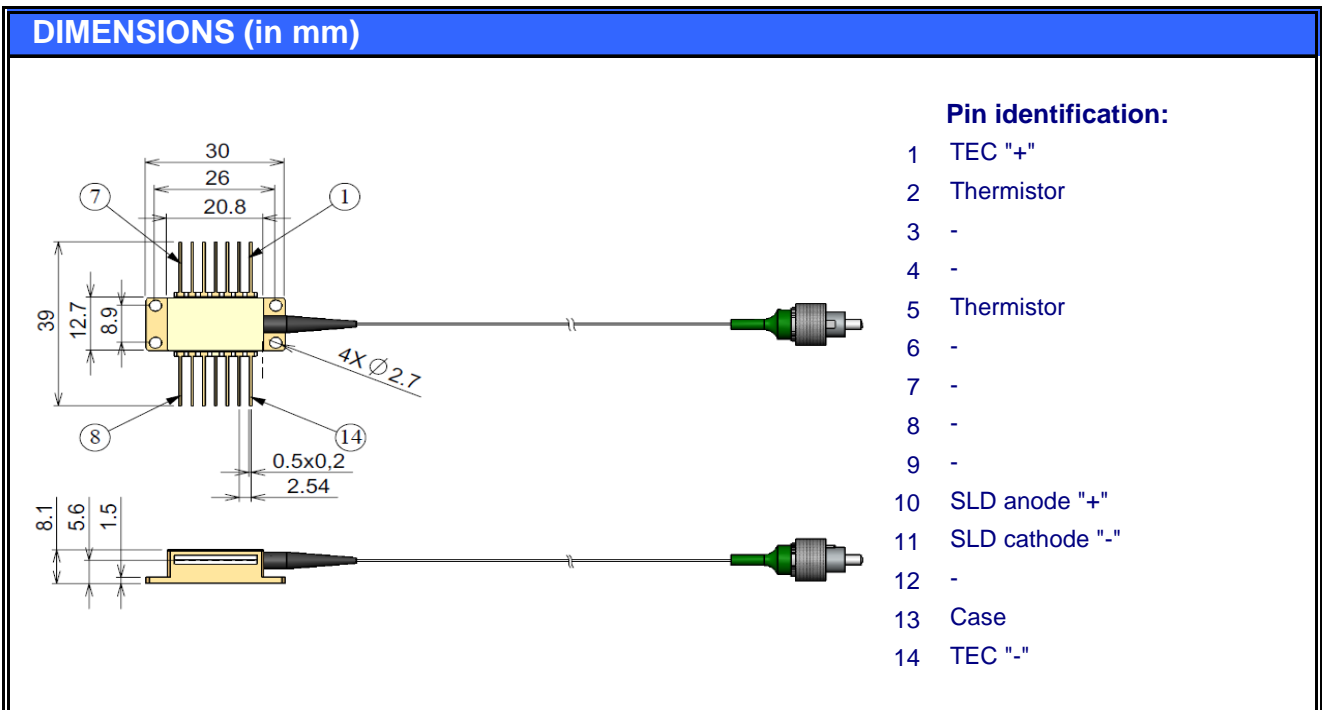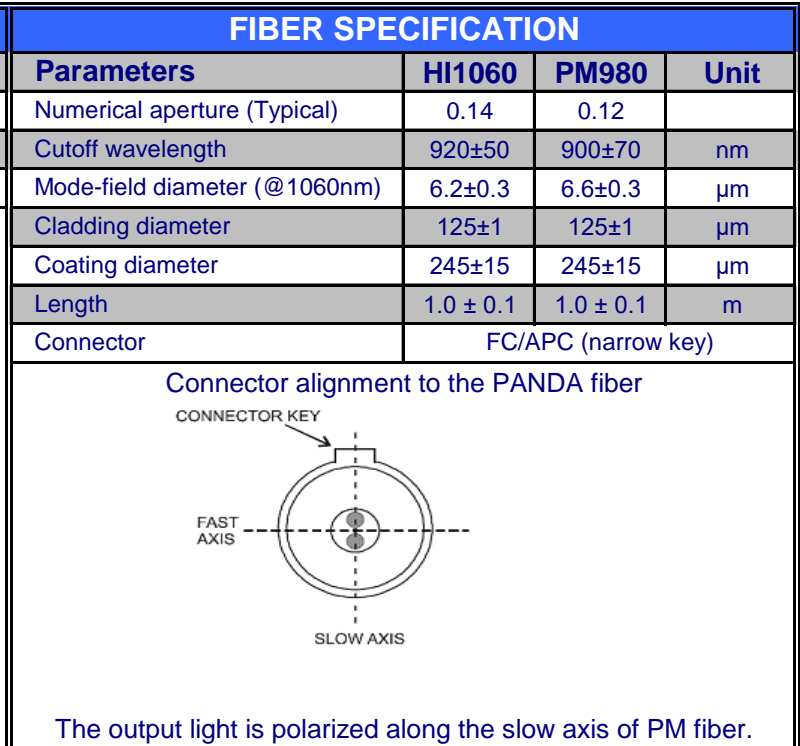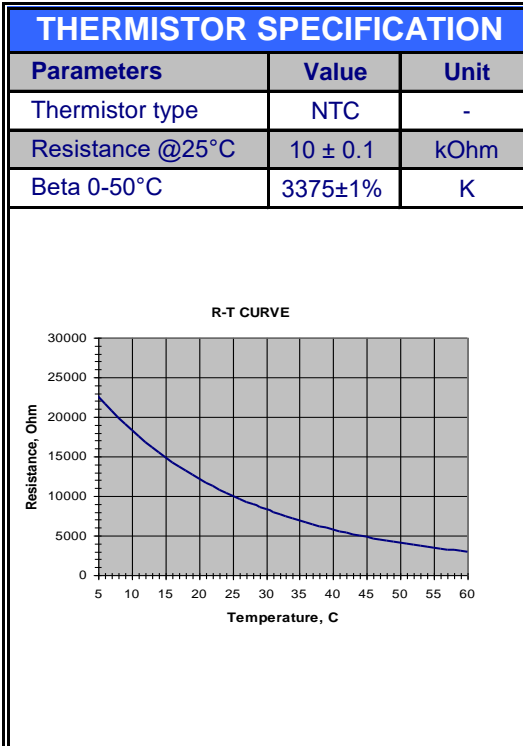

SAFETY AND OPERATING INSTRUCTIONS

The light emitted from this device is invisible and can be harmful to the human eye. Avoid looking directly into the fiber connector when the device is in operation. Proper laser safety eyewear must be worn during operation with open connector.

Absolute Maximum Ratings may be applied to the device for short period of time only. Exposure to maximum ratings for extended period of time or exposure to more than one maximum rating may cause damage or affect the reliability of the device. Operating the device outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum forward current cannot be exceeded.

A proper heatsink for the device on thermal radiator is required. The device must be mounted on radiator with 4 screws (bolt down in X-style fashion with initial torque set to 0.075Nm and final X-style bolt down at 0.15Nm) or with clamps. The deviation from flatness of radiator surface must be less than 0.05mm. It's recommended using of Indium foil or thermal conductive and soft material between bottom of the case and heatsink for thermal interface. It's undesirable to use thermal grease for this.

Avoid back reflection to the device. It may give impact on the device performance in aspects of spectrum and power stability. It also may cause fatal facet damage. Using of optical isolators is highly recommended to block back reflection.

Do not pull the fiber. Do not bend a fiber with a radius smaller than 3 cm. Fiber tip should always be protected from any contamination or damage during the process of installation. After removing the dust-preventing cap covered at fiber tip, carefully clean fiber tip by wiping through one direction using optical lens cleaning paper or cotton swab dabbed with Iso-Propanol or Ethyl alcohol. Operate the device with clean fiber connector only.

Electrostatic discharge is the primary cause of unexpected product failure. Take extreme precaution to prevent ESD. During device installation, ESD protection has to be maintained - use wrist straps, grounded work surfaces and rigorous antistatic techniques when handling the product.



Part Number Identification

YY: Optical fiber type
 PM – PM980 fiber
 HI – HI1060 fiber
 Example: SLD-1190-90-PM-1

NOTE: Innolume product specifications are subject to change without notice